



## Taicron Navy Blue HW-T ECO

### Exhaustion Dyeing 浸染




### Dyes Properties 染料特性

Dispersibility 分散性	Migration 移染性	Liquor ratio 浴比	pH range pH 範圍	HT Dyeing 高溫染色	Carrier Dyeing 導染劑法
◎	◎	◎	3~9	◎	○

Effect of Metal Ion 金屬離子影響				Rate of Dyeing 染色速率	Build up 上色性
Fe <sup>++</sup>	Cu <sup>++</sup>	Mg <sup>++</sup>	Ca <sup>++</sup>	◎	◎
○	○	◎	◎		

Staining on 纖維污染			Exhaustion 浸染適性	Continuous 連染適性	Printing 印花適性
Nylon 2YD	Cotton 5	Rayon 5	◎	○~△	◎

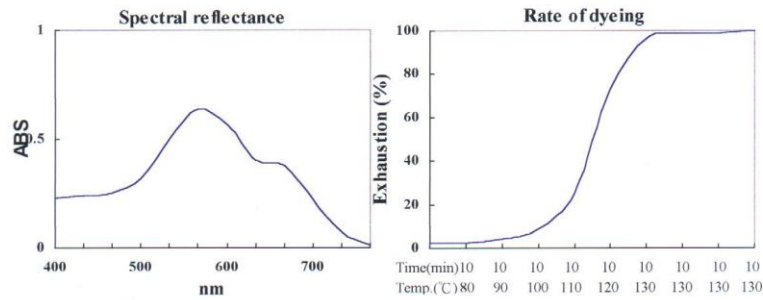



## Taicron Navy Blue HW-T ECO

### Washing Properties 水洗特性 (2.0 % o.w.f.)

49°C (AATCC 61 2A) 49°C 耐水洗						Dry Heat 耐乾熱	
Acetate	Cotton	Nylon	Polyester	Acrylic	Wool	165°C	180°C
4	5	4	4-5	5	5	5	4-5

60°C (M&S C4A) 60°C 耐水洗						Chlorine 耐氯水	
Acetate	Cotton	Nylon	Polyester	Acrylic	Wool	Alter 色變	Pes 污染
4-5	5	4	4-5	5	4-5	5	5

### Color Fastness 堅牢度 (2.0 % o.w.f.)

Sublimation 耐昇華		Rubbing 耐摩擦		Perspiration 耐汗	
N	Pes	Dry 乾	Wet 濕	Acid 酸	Alkali 鹼
4	4	5	5	5	5

Light 耐光		Water 耐水		Dry Cleaning 耐乾洗	
0.5 % o.w.f.	2.0 % o.w.f.	Nylon	Cotton	Alter 色變	Pes 污染
5-6	6	5	5	5	5

### Printing Properties 印花特性

Dischargeability				Sublimation Staining on Fixation	
Reduction agent 還原劑		Alkali agent 鹼劑		機內昇華污染	
White 拔白	Color 入色	White 拔白	Color 入色	HP	HT
X	X	X	X	◎	○~△