


## Taitilon Red 2B-T KWL 200%

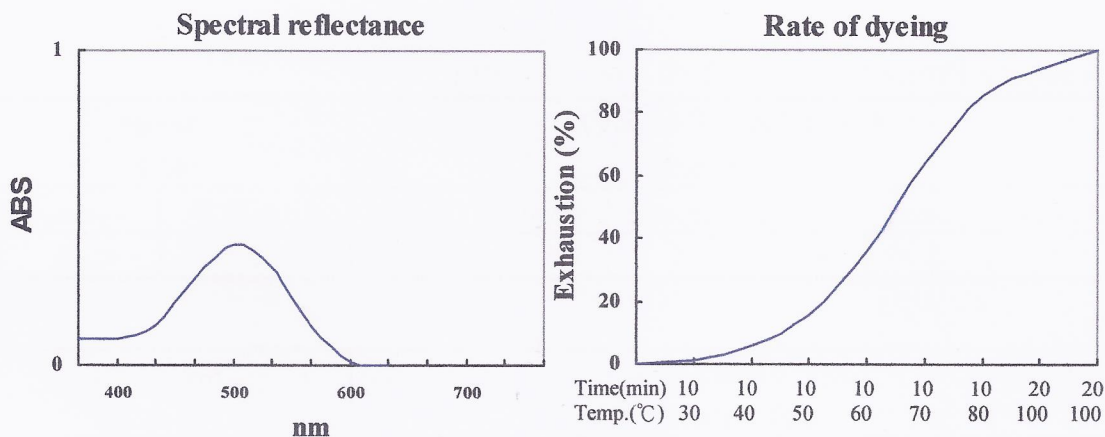

### Dyes Properties 染料特性

Dye Class 染料分類	Levelling 均染性	Solubility 80 °C 溶解度	Liquor ratio 浴 比	Rate of Dyeing 染色速率	Build up 上色性
L	◎	90 g/l	◎	◎	◎

Staining on 纖維污染					
Cotton	Nylon	Wool	Acrylic	Silk	Polyester
3	1	1~2	3~4	2	4~5

Exhaustion 浸染適性	Continuous 連染適性	Printing 印花適性
◎	◎	◎

### Exhaustion Dyeing 浸 染



0.125 % o.w.f.



0.25 % o.w.f.



0.5 % o.w.f.



## Taitilon Red 2B-T KWL 200%

### Washing Properties 水洗特性 (0.5 % o.w.f.)

49°C (AATCC 61 2A) 49°C 耐水洗						Water 耐水	
Acetate	Cotton	Nylon	Polyester	Acrylic	Wool	Alter 色變	Nylon 污染
5	5	4~5	5	5	4~5	5	5

60°C (M&S C4A) 60°C 耐水洗						See Water 耐海水	
Acetate	Cotton	Nylon	Polyester	Acrylic	Wool	Alter 色變	Nylon 污染
4~5	4~5	4	5	5	4	5	4

### Color Fastness 堅牢度 (0.5 % o.w.f.)

Dry Cleaning 耐乾洗		Chlorinated Water 耐氯水		Perspiration 耐汗 Acid 酸	
Alter 色變	Nylon 污染	Alter 色變	Nylon 污染	Alter 色變	Nylon 污染
5	5	4~5	5	5	5

Light 耐光		Rubbing 耐摩擦		Perspiration 耐汗 Alkaline 鹼	
0.125 % o.w.f.	0.5 % o.w.f.	Dry 乾	Wet 濕	Alter 色變	Nylon 污染
5	6	5	4~5	4~5	4

### Printing Properties 印花特性

Reduction agent 還原劑 Dischargeability 拔染性		Dependence on Steaming 蒸處依存性		Dependence on Steaming Process 適用蒸處方式	
Decrolin	SnCl <sub>2</sub>	Temperature	Time	HPS	HTS
X	○	⊙	⊙	⊙	○