




Tairus Supra Brown GTL-T

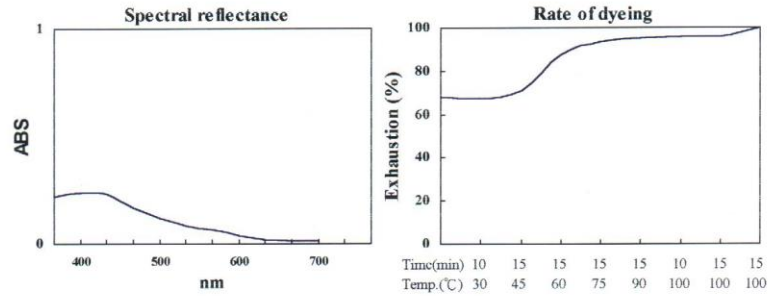

Dyes Properties 染料特性

Classification S.D.C.分類	Levelling 均染性	Solubility 80 °C 溶解度	Liquor ratio 浴 比	High Temp. 高溫染色	Build up 上色性
B	⊙	70 g/l	⊙	⊙	⊙

Exhaustion 浸染適性	Continuous 連染適性	Printing 印花適性
⊙	⊙	⊙

Staining on 纖維污染					
Cotton	Nylon	Wool	Rayon	Acrylic	PES
1	3	1~2	1	5	5

Exhaustion Dyeing 浸 染



0.5 % o.w.f.



1.0 % o.w.f.



2.0 % o.w.f.



Tairus Supra Brown GTL-T

Washing Properties 水洗特性 (2.0 % o.w.f.)

49°C (AATCC 61 2A) 49°C 耐水洗						Water 耐水	
Acetate	Cotton	Nylon	Polyester	Acrylic	Wool	Alter 色變	Cotton 污染
5	3	5	5	5	5	4	4-5

60°C (M&S C4A) 60°C 耐水洗						See Water 耐海水	
Acetate	Cotton	Nylon	Polyester	Acrylic	Wool	Alter 色變	Cotton 污染
5	2-3	5	5	5	5	5	5

Color Fastness 堅牢度 (2.0 % o.w.f.)

Dry Cleaning 耐乾洗		Chlorine Water 耐氯水		Perspiration 耐汗 Acid 酸	
Alter 色變	Cotton 污染	Alter 色變	Cotton 污染	Alter 色變	Cotton 污染
5	5	4	5	5	5

Light 耐光		Rubbing 耐摩擦		Perspiration 耐汗 Alkaline 鹼	
0.2 % o.w.f.	2.0 % o.w.f.	Dry 乾	Wet 濕	Alter 色變	Cotton 污染
3-4	4	4	3	5	5

Printing Properties 印花特性

Reduction agent 還原劑 Dischargeability 拔染性	Dependence on Steaming 蒸處依存性		Dependence on Steaming Process 適用蒸處方式	
	Temperature	Time	HPS	HTS
◎	◎~○	◎	◎	○

Chief	Tester	Date	Data No.
Michael 104.10.24 B5/00063-001			

Proposal *ATK*


Material: Cotton 100%

Process: Dyeing (100°C X50') S-300 1g/l (40°C X15') → Dyefix Dr-119 4% (60°C X20') Ph5


Results: Tairus Supra Brown GTL-T



Staining Test

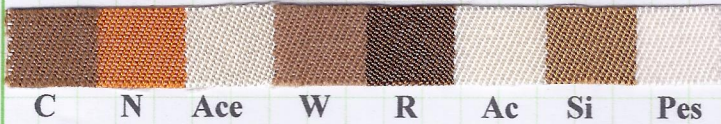

Washing Fastness (AATCC2A)

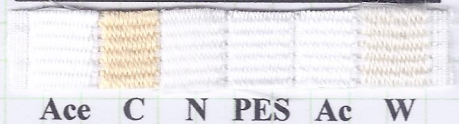

Perspiration Fastness Test (37±2°C X4hours) 2.00%

Acid



Alkaline



Water Fastness Test (37±2°C X4hours)

2.00%



Sea Water Fastness Test (37±2°C X4hours)

2.00%



Light Fastness Test 40 hours

Untreat Treat

0.50%



2.00%



Rubbing Test 2.00%

Dry Wet

